

Model
2555

1-, 10-, 40-Gigabit Ethernet

Talon RTR
Rugged Recorder

Small Form
Factor

Features

- Records gigabit, 10-gigabit or 40-gigabit Ethernet streams
- TCP and UDP protocols
- Optical interfaces available
- Aggregate recording rates to 4.0 GB/sec
- Up to 61 terabytes of storage to NTFS RAID disk array
- RAID levels of 0, 5 and 6
- Housed in a small chassis: 5.25" H x 8.5" W x 14" D
- Weighs 17 lb (7.7 kg)
- Shock and vibration-resistant SSDs perform well in vehicles, ships and aircraft
- Windows® workstation with Intel® Core™ i7 processor
- SystemFlow® GUI virtual instrumentation panel for fast, intuitive operation
- C-callable API for integration of recorder into applications
- File headers include time stamping and recording parameters
- Optional GPS time and position stamping



General Information

Optimized for SWaP (size, weight and power), the Pentek Talon® RTR Small Form Factor (SFF) product line provides the performance and storage capacity previously only possible in much larger rack-mountable chassis. Measuring 5.25" H x 8.5" W x 14" D and weighing only 17 pounds (7.7 kg), this small package can hold up to 61 TB of SSD storage.

The Talon® RTR 2555 is a complete turnkey recording and playback system for storing 1-, 10- and 40-gigabit Ethernet streams. It is ideal for capturing any type of streaming sources including live transfers from sensors or data from other computers and supports both TCP and UDP protocols.

An ATX power supply accepts 110 to 240V AC, drawing under 170 W and typically around 115 W. These models have the option for a 12 to 28V DC power supply. Eight front panel data drives can be easily removed along with a front panel removable OS drive to allow all non-volatile memory to be removed from the system in seconds. Optional GPS time and position stamping accurately identifies each record in the file header.

Rugged Chassis with SSD Storage

The SFF system is configured with hot-swappable SSDs, front-panel USB ports, and I/O connectors on the rear panel. It is built in an extremely rugged steel and aluminum chassis and is tested for shock and vibration.


The SSDs provide storage capacities of up to 61 TB. Drives can be easily removed or exchanged during or after a mission to retrieve recorded data. Multiple RAID levels, including 0, 5, and 6, provide a choice for the required level of redundancy.



A push of a button unlatches each of the data drives and the OS drive. Drives are mounted on sleds and can be easily transferred to an offload system while the recorder stays in the field.

PC and signal I/O is available on the rear panel with standard connectors.

2555 Block Diagram

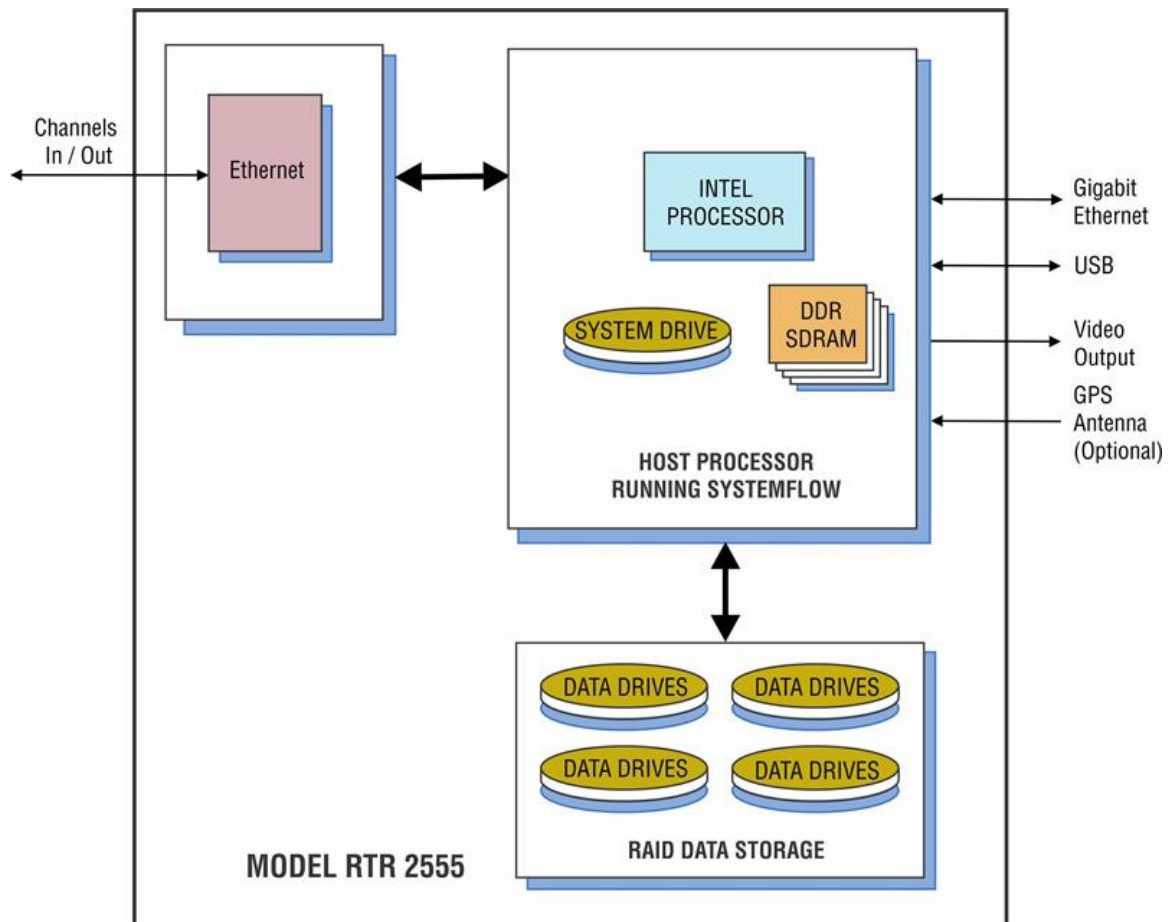

SystemFlow Software

All Talon recorders include the Pentek SystemFlow® recording software. SystemFlow software provides three ways for users to configure and control a Talon recorder:

- The SystemFlow GUI provides a point-and-click user interface. It includes Configure, Record, Playback, and Status screens, each with intuitive controls and indicators. The user can easily move between screens to configure parameters, control and monitor a recording, and play back a recorded stream.
- The [SystemFlow API](#) provides a set of C-callable libraries that allow engineers to develop their own user interface to configure and control their Talon recorder.
- The [SystemFlow Telnet](#) interface provides a simple set of commands to configure and control the recorder. This eliminates the need for any software development and is most suitable for unmanned operation.

SystemFlow software allows the recorder to be set up to run autonomously by implementing scripts using the API or telnet interface. All three interfaces can be run from a remote connection over Gigabit Ethernet.

A simple header that holds the recording parameters is added to the beginning of the file. An optional GPS receiver allows the user to precisely timestamp files and optionally track the recorder's position throughout a mission. The system records all data to the native NTFS file system, allowing for quick and easy access to the data from any computer.

Click below to view a video about SystemFlow.



SystemFlow Simulator

To learn more about the SystemFlow Software, you can [download and install the free SystemFlow Simulator](#) to your desktop or laptop PC. The [SystemFlow Simulator](#) allows you to learn how to use the Talon recording system's SystemFlow software interface before you acquire a recorder or while you are waiting for delivery of a Talon recording system.


The Simulator can simulate the operating environment of all the different Talon recorder models. The Simulator also demonstrates the [SystemFlow Signal Viewer](#) by playing recorded signals to simulate the appearance of live signals being digitized and recorded by a Pentek analog signal recorder.

Features

- Provides real-time recording system simulation
- Demonstrates SystemFlow signal & file viewer tools
- Capable of simulating all Talon analog and digital recording systems
- Full Talon SystemFlow GUI
- Simulator can be used to develop Talon system profiles for use in the final system
- Can be used with the [SystemFlow API](#) to develop and test custom user interface

SystemFlow Main Interface

The RTR 2555 GUI shows a block diagram of the system and provides the user with a control interface for the recording system. It includes Configure, Record, Playback, and Status screens, each with intuitive controls and indicators. The user can easily move between screens to configure parameters, control and monitor a recording, and play back a recorded stream.

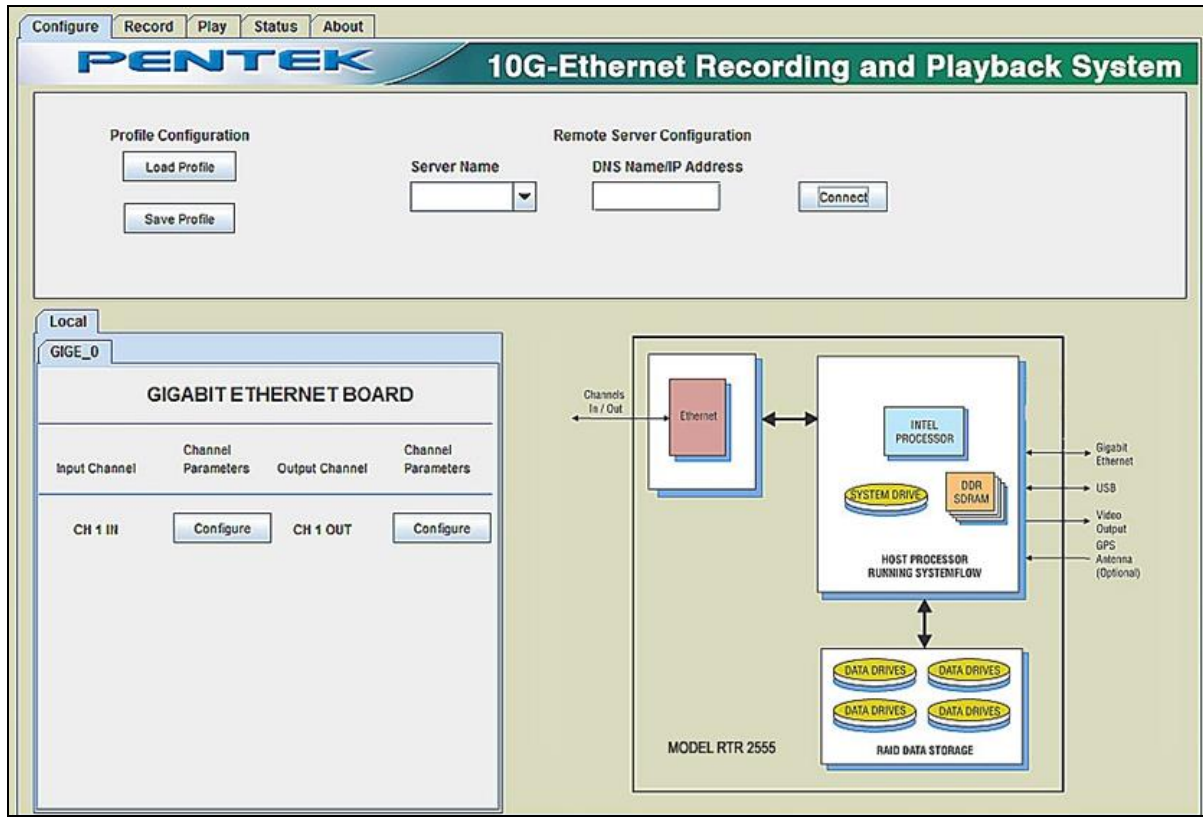

Setting System Parameters

Parameters are entered for each input or output channel specifying UDP or TCP protocol, client or server connection, the IP address and port number. All parameters contain limit-checking and integrated help to provide an easier-to-use out-of-the-box experience.

Input Channel 1 Parameters

Protocol:

Client/Server:

IP Address:

Port Number:

SystemFlow API

SystemFlow includes a complete API (Application Programming Interface) supporting control and status queries of all operations of the Talon recorder from a custom application.

High-level C-language function calls and the supporting device drivers allow users to incorporate the RTR 2555 as a high-performance server front end to a larger system. This is supported using a socket interface through the Ethernet port, either to a local host or through an internet link for remote, standalone acquisition. Recorded NTFS files can be easily retrieved through the same connection.

Below is an example of controlling recording via the SystemFlow API.

```

728     }
729     //transfer until end of disk
730     else if (transferType == TRANSFER_END_OF_DISK)
731     {
732         recordParams->transferTime    = 0;           // must set to 0
733         recordParams->transferLength  = 0;           // must set to 0
734     }
735
736     ////////////////////////////////// Start the record //////////////////////////////////
737     SetConsoleTextAttribute (hConsole, FOREGROUND_GREEN | FOREGROUND_INTENSITY );
738     printf("\nCase 6: RTS_Record\n");
739     SetConsoleTextAttribute (hConsole, wOldColorAttrs);
740
741     //trigger immediately
742     if(recordParams->trigger == RTS_TRIGGER_IMMEDIATELY)
743     {
744         //send record command
745         if ((error = RTS_Record(++msgNum,
746                               serverInfo,
747                               recordParams,
748                               recordChanId,
749                               fileName[0])) != RTS_SUCCESS)
750         {
751             printf("Record Error # 0x%lx.\n", error);
752             exitHandler(error);
753             goto freeMem;
754         }
755
756         Sleep(500);
757     }
758
759     //wait for SW trigger
760     else if(recordParams->trigger == RTS_WAIT_FOR_SW_TRIGGER)
761     {
762         //send record command which set up record and start DMA
763         if ((error = RTS_Record(++msgNum,
764                               serverInfo,
765                               recordParams,
766                               recordChanId,
767                               fileName[0])) != RTS_SUCCESS)


```

SystemFlow Telnet

The Talon telnet facility is an optional feature that can be requested when ordering one of Pentek's Talon recording systems. The Talon telnet facility allows you to control a Talon recorder from a remote computer. You also can use the Talon recorder's SystemFlow [Signal Viewer](#) to remotely monitor real-time data.

Pentek's [Telnet Facility for Talon Recording Systems User's Guide](#) provides instructions for setting up telnet access and describes all the supported commands.

Below is an example of use of the "record" command:

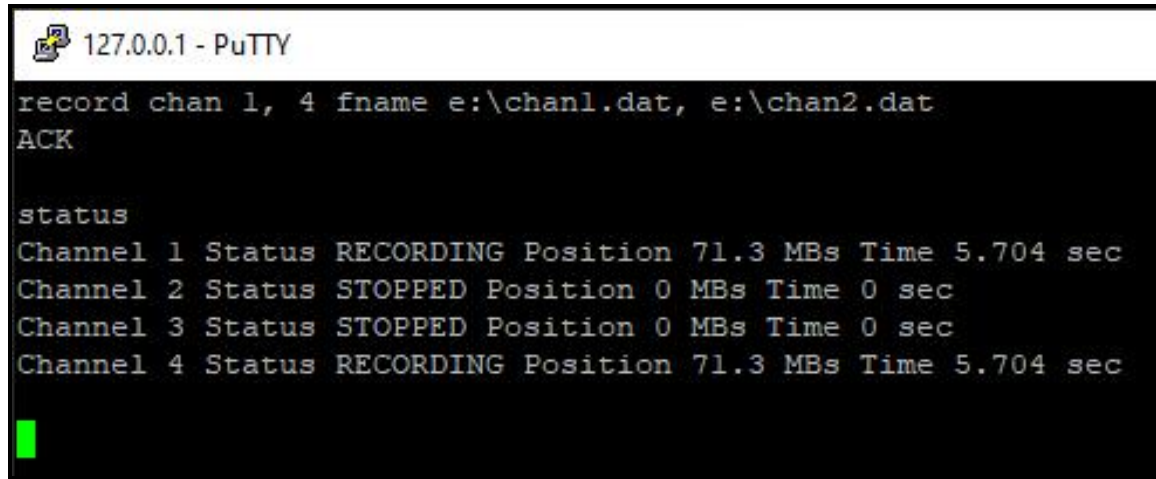

```
127.0.0.1 - PuTTY
record chan 1, 4 fname e:\chan1.dat, e:\chan2.dat
ACK

status
Channel 1 Status RECORDING Position 71.3 MBs Time 5.704 sec
Channel 2 Status STOPPED Position 0 MBs Time 0 sec
Channel 3 Status STOPPED Position 0 MBs Time 0 sec
Channel 4 Status RECORDING Position 71.3 MBs Time 5.704 sec
```


Specifications

PC Workstation (standard configuration)

Operating System: Windows®

Processor: Intel® Core™ i7 processor

Operating System Drive: 250 GB SSD

SDRAM: 8 standard, 16 GB or 32 GB optional

RAID

Total Storage: 3.8 TB – 61 TB

Supported RAID Levels: 0, 5 and 6

Drive Bays: Hot-swap, removable, front panel

Rear Panel I/O

Four USB 2.0 ports

Two SMA antenna connectors (2T2R)

HDMI port

USB 3.1 Gen 1 port, USB 3.1 Gen 2 Type-A port

USB Type-C port

RJ-45 LAN port

Front Panel I/O

Two USB ports

Power and recessed RESET buttons

LED indicators for power and HDD access

Physical and Environmental

Dimensions: 5.25" H x 8.5" W x 14.0" D

Weight: 17 lb (7.7 kg)

Operating Temp: 0° to +45° C

Storage Temp: -40° to +85° C

Relative Humidity: 5% to 95%, non-condensing

Operating Shock: 15 g max. (11 msec, half-sine wave)

Operating Vibration: 10 to 20 Hz: 0.02 inch peak,
20 to 500 Hz: 1.4 g peak acceleration

Power Requirements: 100 to 240 VAC, 50 to 60 Hz,
170 W max.

Lifetime Applications Support

Pentek offers the worldwide military embedded computing community shorter development time, reliable, rugged solutions for a variety of environments, reduced costs, and mature software development tools. We offer free lifetime support from our engineering staff, which customers can depend on through phone and email, as well as software updates. Take advantage of Pentek's 30 years of experience in delivering high-performance radar, communications, SIGINT, EW, and data acquisition MIL-Aero solutions worldwide.

Ordering Information

Click [here](#) for more information.

Interface Options	
Option -101	Gigabit Ethernet
Option -102	10-Gigabit Ethernet
Option -103	40-Gigabit Ethernet
Channel Configuration	
Option -201	1- Ethernet port
Option -202	2- Ethernet ports
Option -204	4- Ethernet ports
Ethernet Connector Options	
Option -280	SFP+ connectors
Option -281	Multi-mode optical, LC connectors
Option -282	Single-mode optical, LC connectors
Option -284	RJ45 Connector
RAID	
Option -285	RAID 5 configuration
Option -286	RAID 6 configuration
Memory	
Option -309	16 GB system memory
Option -310	32 GB system memory
Storage Options	
Option -410	3.8 TB SSD storage capacity
Option -415	7.6 TB SSD storage capacity
Option -420	15.3 TB SSD storage capacity
Option -430	30.6 TB SSD storage capacity
Option -460	61 TB SSD storage capacity
General Options	
Option -261	GPS time and position stamping
Option -285	RAID 5 configuration
Option -286	RAID 6 configuration
Option -309	16 GB system memory
Option -310	32 GB system memory
Option -630	12 to 28V DC power supply
Contact Pentek for compatible Option combinations. Storage and General Options may change, contact Pentek for latest information.	

Pricing and Availability

To learn more about our products or to discuss your specific application please contact [your local representative](#) or Pentek directly:

Pentek, Inc.
One Park Way
Upper Saddle River, NJ 07458 USA
Tel: +1 (201) 818-5900
Email: sales@pentek.com